


600V XLPE/PVC (FR-CV)耐燃電纜

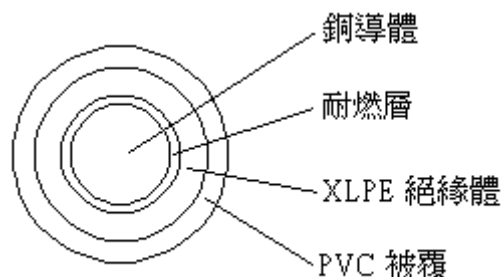

電纜構造:

導 體: 單線、絞線或圓型壓縮軟銅線

耐燃層: 非石棉材質耐火帶

絕緣體: 交連 PE(XLPE)材料

被覆體: 聚氯乙烯(PVC)材料

參考規範: 消防署-耐燃電纜認可基準

600V XLPE/PVC(FR-CV) 耐燃電纜-(單芯)

導 體			耐燃層 厚度 (註)	絕 緣 厚 度	被 覆 厚 度	完成 外徑 (約)	導體 電阻 (20°C)	試 驗 電 壓	絕緣 電阻 (20°C)	標 準 長 度
標稱截 面 積	組 成	外徑(約)								
mm ²	No./mm	mm	mm	mm	mm	mm	Ω/Km	kV/1min	MΩ·Km	m
--	1/1.2	1.2	0.4	0.8	1.5	6.6	15.8	1.5	2500	300
--	1/1.6	1.6	0.4	0.8	1.5	7.1	8.92	1.5	2500	300
--	1/2.0	2.0	0.4	0.8	1.5	7.4	5.65	1.5	2500	300
--	1/2.6	2.6	0.4	1.0	1.5	8.4	3.35	1.5	2500	300
1.25	7/0.45	1.35	0.4	0.8	1.5	6.8	16.5	1.5	2500	300
2	7/0.6	1.8	0.4	0.8	1.5	7.4	9.24	1.5	2500	300
3.5	7/0.8	2.4	0.4	0.8	1.5	8.0	5.20	1.5	2500	300
5.5	7/1.0	3.0	0.4	1.0	1.5	9.0	3.33	1.5	2500	300
8	7/1.2	3.2	0.4	1.0	1.5	9.2	2.29	1.5	2000	300
14	7/1.6	4.4	0.6	1.0	1.5	10.1	1.31	2.0	1500	300
22	7/2.0	5.5	0.6	1.2	1.5	11.6	0.832	2.0	1500	300
30	7/2.3	6.3	0.6	1.2	1.5	12.4	0.610	2.0	1500	300
38	7/2.6	7.1	0.6	1.2	1.5	13.2	0.481	2.5	1500	300
50	19/--	8.2	0.6	1.5	1.5	14.8	0.366	2.5	1500	300
60	19/--	9.2	0.6	1.5	1.5	15.8	0.305	2.5	1500	300
80	19/2.3	10.5	0.6	1.5	1.5	17.1	0.229	2.5	1500	300
100	19/2.6	11.9	0.6	2.0	1.5	19.5	0.183	3.0	1500	300
125	19/2.9	13.2	0.6	2.0	1.5	20.8	0.146	3.0	1000	300
150	37/2.3	14.8	0.6	2.0	1.6	22.6	0.122	3.0	1000	300
200	37/2.6	16.7	0.6	2.5	1.7	25.5	0.0915	3.0	1000	200
250	61/2.3	19.0	0.6	2.5	1.8	28.0	0.0739	3.0	1000	200
325	61/2.6	21.5	0.6	2.5	1.9	30.7	0.0568	3.0	900	200

註:如有爭議悉以消防署耐燃認可基準為準



大亞集團

大亞電線電纜

大亞電線電纜股份有限公司

Ta Ya Electric Wire & Cable Co.,Ltd.