


耐熱電線電纜(HR-CV-SB)

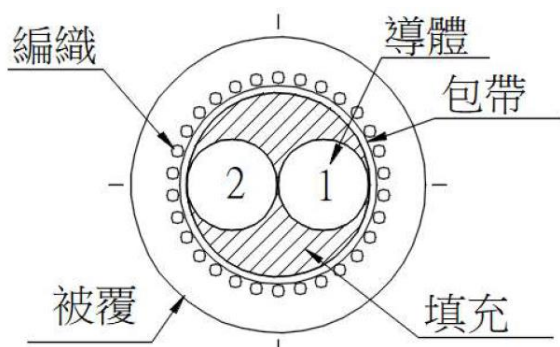

電纜構造：

導 體：軟銅單線或軟銅絞線

絕 緣：交連聚乙烯(XLPE)材質

絞 合：(多芯適用)

包 帶：必要時

遮 蔽 層：軟銅線或鍍錫軟銅線

被 覆：聚氯乙稀(PVC)材質

參考規範：消防署--耐熱電線電纜認可基準

使用範圍：消防系統用線

標稱電壓：600V 以下

芯 數	導 體			絕 緣 厚 度 mm	被 覆 厚 度 mm	最導 體 電 大阻 Ω/km (20℃)	試驗 電壓 kV/分	最絕 緣 電 小阻 MΩ·km (20℃)	完 成 外 徑 mm (約)
	規 格	構 成 No./mm	外 徑 mm						
1 2 3 4 7 10 12 24 30	0.65 mm	1/0.65	0.65	0.4	0.8	53.0	1.5/1	50	3.7
2					1.0	53.0			5.5
3					1.0	53.0			5.7
4					1.0	53.0			6.1
7					1.0	53.0			7.1
10					1.0	53.0			8.5
12					1.0	53.0			8.7
24					1.0	53.0			11.4
30	1.0	53.0	12.0						
1 2 3 4 7 10 12 24 30	0.9 mm	1/0.9	0.9	0.4	0.8	28.5	1.5/1	50	4.0
2					1.0	28.5			6.0
3					1.0	28.5			6.3
4					1.0	28.5			6.7
7					1.0	28.5			7.8
10					1.0	28.5			9.5
12					1.0	28.5			9.8
24					1.0	28.5			12.9
30	1.0	28.5	13.6						
1 2 3 4 7 10 12 24 30	1.0 mm	1/1.0	1.0	0.5	0.8	23.1	1.5/1	50	4.2
2					1.0	23.1			6.6
3					1.0	23.1			6.9
4					1.0	23.1			7.4
7					1.0	23.1			8.7
10					1.0	23.1			10.7
12					1.0	23.1			11.0
24					1.0	23.1			15.0
30	1.1	23.1	15.5						
1 2 3 4 7 10 12 24 30	1.2 mm	1/1.2	1.2	0.5	0.8	16.0	1.5/1	50	4.2
2					1.0	16.0			7.0
3					1.0	16.0			7.3
4					1.0	16.0			7.9
7					1.0	16.0			9.3
10					1.0	16.0			11.5
12					1.0	16.0			11.8
24					1.1	16.0			15.9
30	1.1	16.0	17.0						
1 2 3 4 7 10 12 24 30	1.6 mm	1/1.6	1.6	0.5	0.8	9.01	1.5/1	50	4.8
2					1.0	9.01			7.8
3					1.0	9.01			8.2
4					1.0	9.01			8.9
7					1.0	9.01			10.5
10					1.0	9.01			13.1
12					1.0	9.01			13.5
24					1.3	9.01			18.5
30	1.3	9.01	20.0						
1 2 3 4 7 10 12 24 30	2.0 mm	1/2.0	2.0	0.5	0.8	5.77	1.5/1	50	5.2
2					1.0	5.77			8.6
3					1.0	5.77			9.1
4					1.0	5.77			9.8
7					1.0	5.77			11.7
10					1.0	5.77			14.7
12					1.0	5.77			15.2
24					1.3	5.77			21.3
30	1.3	5.77	22.5						
1 2 3 4 7 10 12 24 30	1.25 mm ²	7/0.45	1.35	0.5	0.8	16.8	1.5/1	50	4.6
2					1.0	16.8			7.3
3					1.0	16.8			7.7
4					1.0	16.8			8.3
7					1.0	16.8			9.8
10					1.0	16.8			12.1
12					1.0	16.8			12.5
24					1.1	16.8			17.0
30	1.1	16.8	18.0						
1 2 3 4 7 10 12 24 30	2 mm ²	7/0.6	1.8	0.8	0.8	9.43	1.5/1	50	5.0
2					1.0	9.43			8.2
3					1.0	9.43			8.6
4					1.0	9.43			9.4
7					1.0	9.43			11.1
10					1.1	9.43			13.9
12					1.1	9.43			14.8
24					1.3	9.43			20.1
30	1.3	9.43	21.3						

*註：如有爭議時以消防署耐熱電線電纜認可基準為準。



大亞集團

大亞電線電纜

大亞電線電纜股份有限公司

Ta Ya Electric Wire & Cable Co., Ltd.